
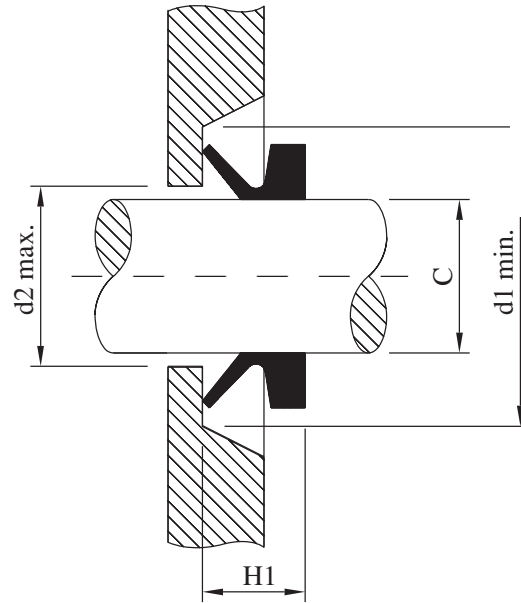


# Tobar

## Seal Type VL

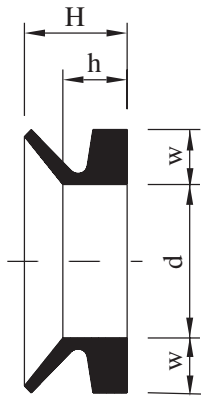

Reference	Shaft C	d	w	h	H	d2	d1	H1
VL 140	135 - 145	126	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 150	145 - 155	135	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 160	155 - 165	144	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 170	165 - 175	153	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 180	175 - 185	162	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 190	185 - 195	171	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 200	195 - 210	182	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 220	210 - 233	198	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 250	233 - 260	225	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 275	260 - 285	247	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 300	285 - 310	270	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 325	310 - 335	292	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 350	335 - 365	315	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 375	365 - 385	337	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 400	385 - 410	360	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 425	410 - 440	382	6.5	6	10.5	C + 5	C + 20	8 ± 1.5
VL 450	440 - 475	405	6.5	6	10.5	C + 5	C + 20	8 ± 1.5